

(12) United States Patent Park et al.

(10) Patent No.:

US 6,498,933 B1

(45) Date of Patent:

Dec. 24, 2002

(54)	METHOD FOR TRANSMITTING DATA FOR
	INTER-FREQUENCY/INTER-SYSTEM
	HANDOVER IN MOBILE
	TELECOMMUNICATIONS SYSTEM

(75) Inventors: Jae Hong Park, Seoul (KR); Chong
Won Lee, Seoul (KR); Yeon Sang Koo,
Seoul (KR); Shin Hyun Yang, Seoul
(KR); Jeong Hwa Ye, Seoul (KR); Yu
Ro Lee, Seoul (KR); Ho Geun Lee,
Seoul (KR)

(73) Assignee: Hyundai Electronics Inc. Co., Ltd., Kyungki-Do (CN)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 09/566,878(22) Filed: May 8, 2000

(30) Foreign Application Priority Data

(KR) 99-2528	Jun. 29, 1999	
(KR) 2000-1068	. 3, 2000	Ma
H04Q 7/0	Int. Cl. ⁷	(51)
455/436; 455/438; 370/33	U.S. Cl.	(52)
Search 455/436, 437	Field of	(58)
455/438, 439, 440, 442, 444, 450; 370/331		

(56) References Cited

U.S. PATENT DOCUMENTS

5,101,501 A 3/1992 Gilhousen et al. 455/436

5,627,830	Α	•	5/1997	Kotzin	370/350
5,640,679	Α		6/1997	Lundqvist et al	455/436
5,649,000	Α		7/1997	Lee et al	455/436
6,308,066	B 1	٠	10/2001	Rata et al	455/437


^{*} cited by examiner

Primary Examiner—Thanh Cong Le (74) Attorney, Agent, or Firm—Bryan Cave LLP

(57) ABSTRACT

A method for transmitting data for inter-frequency/intersystem handover in an asynchronous UTRA mobile telecommunications system, wherein information incapable of being transmitted for an idle period is transmitted over a common channel in the case of the inter-frequency handover or inter-system handover, thereby increasing the quality of speech and more efficiently performing the handover. A base station assigns a common channel to a mobile station connected thereto if inter-frequency (inter-system) handover is requested by the mobile station. Then, the base station transmits information about the assigned common channel to the mobile station and determines whether a transmission frame is an idle frame. The base station transmits data to the mobile station over a dedicated channel if the transmission frame is not the idle frame and over both the dedicated channel and common channel if the transmission frame is the idle frame. If a received frame is the idle frame during data reception, the mobile station receives data from the base station over both the dedicated channel and common channel. Therefore, the present invention has the effect of overcoming a conventional code shortage problem and, because of the assignment of one OVSF code to a common channel, keeping orthogonality with other channels.

16 Claims, 11 Drawing Sheets

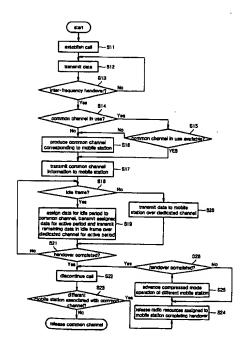

332